UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/769,488	01/29/2004	Shougo Imada	51879/DBP/A400	8744

23363   7590   02/06/2007
CHRISTIE, PARKER & HALE, LLP
PO BOX 7068
PASADENA, CA 91109-7068

EXAMINER
CRAIG, DWIN M

ART UNIT	PAPER NUMBER
2123	

SHORTENED STATUTORY PERIOD OF RESPONSE	MAIL DATE	DELIVERY MODE
3 MONTHS	02/06/2007	PAPER

Please find below and/or attached an Office communication concerning this application or proceeding.

If NO period for reply is specified above, the maximum statutory period will apply and will expire 6 MONTHS from the mailing date of this communication.

PTOL-90A (Rev. 10/06)

	Application No.	Applicant(s)
Office Action Summary	10/769,488	IMADA ET AL.
	Examiner	Art Unit	
	Dwin M. Craig	2123	

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE <u>3</u> MONTH(S) OR THIRTY (30) DAYS, WHICHEVER IS LONGER, FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

1)☒ Responsive to communication(s) filed on <u>29 January 2004</u>.

2a)☐ This action is **FINAL**.   2b)☒ This action is non-final.

3)☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims

4)☒ Claim(s) <u>1-24</u> is/are pending in the application.

    4a) Of the above claim(s) _____ is/are withdrawn from consideration.

5)☐ Claim(s) _____ is/are allowed.

6)☒ Claim(s) <u>1-24</u> is/are rejected.

7)☒ Claim(s) <u>1-24</u> is/are objected to.

8)☐ Claim(s) _____ are subject to restriction and/or election requirement.

Application Papers

9)☐ The specification is objected to by the Examiner.

10)☒ The drawing(s) filed on <u>29 January 2004</u> is/are: a)☒ accepted or b)☐ objected to by the Examiner.

    Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).

    Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).

11)☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

Priority under 35 U.S.C. § 119

12)☒ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).

    a)☒ All   b)☐ Some *   c)☐ None of:

      1.☒ Certified copies of the priority documents have been received.

      2.☐ Certified copies of the priority documents have been received in Application No. _____.

      3.☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).

    * See the attached detailed Office action for a list of the certified copies not received.

Attachment(s)

1) ☒ Notice of References Cited (PTO-892)

2) ☐ Notice of Draftsperson's Patent Drawing Review (PTO-948)

3) ☒ Information Disclosure Statement(s) (PTO/SB/08)
    Paper No(s)/Mail Date <u>1/29/04, 9/7/04, 11/19/04</u>.

4) ☐ Interview Summary (PTO-413)
    Paper No(s)/Mail Date. _____.

5) ☐ Notice of Informal Patent Application

6) ☐ Other: _____.

DETAILED ACTION

1.   Claims 1-24 have been presented for examination.

IDS

2.   The references submitted on the 1/29/2004 PTO Form 1449 are lined through because the

listed references were (ON ORDER) at the time the Form 1449 was submitted. It is noted that

the same references were submitted in the PTO-Form 1449's that were submitted on 9/07/2004

and 11/19/2004 therefore those references have been considered.

Claim Objections

3.   Claims 1-24 are objected to for numerous spelling and typographic errors, the Examiner

requests that the Applicants' review the claims for grammatical, typographic and spelling errors.

The following are examples of claim errors.

3.1   Claim 1 line 1, the word *development* is misspelled.

3.2   Claim 5 is objected to for the following reason, the grammatical structure is creating

ambiguity, and for example the current claim language reads, *"said circuits that are included in*

said interfac(e) <sic> circuit block and equivalent to the hardware of said electronic control

unit include at least on(e) <sic> facility circuit... " the following version of the sentence would

makes sense grammatically, *"said circuits that are included in said interface circuit block and*

the equivalent hardware of said electronic control unit including at least one facility circuit... "

3.3   Claim 5 is objected to because the word *"interface"* in line 3 is misspelled.

3.4   Claim 5 is objected to because the phrase in line 5, *"at least on facility"* doesn't make grammatical sense, the examiner notes that the phrase *"at least <u>one</u> facility"* makes sense in the context of the rest of the claim.

3.5   Claim 7 is objected to because the claim language is grammatically awkward. For example the sentence(s) lines 4-6 reads, *"...in an external storage device connected to said logic development system and a memory included in said logic development system"* doesn't make sense in the context of the claimed limitation which discloses different backup memory systems for the microcomputer logic development system. The following revised sentence makes grammatical sense, *"...in an external storage device connected to said logic development system <u>or</u> a memory included in said logic development system"*.

3.6   Claim 8 is objected to for being grammatically awkward, the following is an editorial version of the claim with editorial corrections, starting on line 2 of the claim *"...wherein initial values to ports are set within an initialization routine which is executed on said center block when said ignition switch is turned on..."*

3.7   Claim 14 is objected to because the following sentence is grammatically awkward, line 5 currently read, *"...with each of acquired interrupt flags"* the sentence should read, *"...with each of <u>the</u> acquired interrupt flags"*.

3.8   Claim 18 is objected to for the following reasons; the following lines are grammatically awkward, for example line 4 reads, *"interrupts caused by each of resources"* is awkward, the following is clearer, *"interrupts caused by each of <u>the</u> resources"*, the same is true for line 12, further the word *"each"* in line 14 of the claim is misspelled.

3.9   Claim 22 is objected to because the word *"processing"* is misspelled in line 17 of the

claim and again in line 18 of the claim. The word *together* is misspelled in line 18.

3.10   Correction and editorial review is required.

Claim Rejections - 35 USC § 112

The following is a quotation of the second paragraph of 35 U.S.C. 112:

The specification shall conclude with one or more claims particularly pointing out and distinctly claiming the subject matter which the applicant regards as his invention.

4.   Claim 9 is rejected under 35 U.S.C. 112, second paragraph, as being indefinite for failing

to particularly point out and distinctly claim the subject matter which applicant regards as the

invention.

Claim 9 recites the limitation *"said PCI bus"* in line 2. There is insufficient antecedent

basis for this limitation in the claim.

Claim Interpretation

5.   The claim language has been given the broadest reasonable interpretation by the

Examiner.

5.1   As regards the phrase, *"quasi microcomputer peripheral"*, the Examiner has interpreted

that phrase to mean a microcomputer peripheral that is implemented in an FPGA using a

hardware description language, see Figure 3 Item #42 and the block(s) labeled FPGA in Figure 4

or item # 42 in Figure 5 or item 42(40) in Figure 8B of Applicants' specification.

5.2   Regarding the phrase, *"virtual input/output register"* the examiner has interpreted this

phrase to mean a register implemented in an FPGA or *"quasi microcomputer peripheral"*.

Claim Rejections - 35 USC § 102

The following is a quotation of the appropriate paragraphs of 35 U.S.C. 102 that form the

basis for the rejections under this section made in this Office action:

A person shall be entitled to a patent unless –

(b) the invention was patented or described in a printed publication in this or a foreign country or in public use or on sale in this country, more than one year prior to the date of application for patent in the United States.

6.   Claims 1 and 2 are rejected under 35 U.S.C. 102(b) as being anticipated by "RIFLE-62: a

flexible environment for prototyping dynamically reconfigurable systems" by Milan Vasilko and

David Long hereafter referred to as Vasilko.

6.1   Regarding claim 1, Vasilko discloses, *a logic development system for a built-in*

microcomputer that is incorporated in an electronic control unit for use (Figure 1 and the

descriptive text more specifically, in the section entitled "2. XC6200-based prototyping

environments", "All of the above XC6200 boards were built primarily for reconfigurable

computing applications..."),

comprising: a center block that includes an application facility and a communication

facility; (Figure 1 and Figure 2 more specifically example "(d) microprocessor accelerator" and

further Figure(s) 3 & 4 the descriptive text in the sections labeled, "5.Software environment" and

"6.Prototyping design flow")

a peripheral block that includes quasi microcomputer peripheral devices which simulate

by software the peripheral devices of a microcomputer so as to execute an input/output process,

a computing facility (Figure(s) 3 & 4 the descriptive text in the sections labeled, "5.Software

environment" and "6.Prototyping design flow" more specifically the text, "We aimed to provide

PCI interface compatibility between RIFLE-62 and XC6200DS[5] to facilitate reuse of available

designs..." and Figure 1 under the block labeled XC4013E note the block labeled "32-bit PCI

interface"),

and a communication facility, and that is connected to said center block over a bus;(

Figure 1 under the block labeled XC4013E note the block labeled "32-bit PCI interface"),

an interface circuit block that includes circuits equivalent to the hardware of said

electronic control unit, and that is connected to said peripheral block, wherein; said

communication facility included in said center block and each of said quasi microcomputer

peripheral devices included in said peripheral block are connected to each other over said bus;

(see the section entitled "3.2 Interconnections" and further the descriptive text which teaches,

"Both address and data busses are split into *primary* and *secondary* sections which are connected

via fast transceivers, The transceivers also isolate external interface (microprocessor and demo

board) signals from the primary busses..." see the microprocessor interface in the Figure 1 block

diagram here is clearly disclose the method of interfacing the "center block" as being the

"microprocessor interface" when connected to a microprocessor like an intel I960 as disclosed in

the descriptive text, see the section which discloses, "2. XC6200-based prototyping

environments ...connected in a mesh, on-board i960 processor...")

. *and said communication facility and each of said quasi microcomputer peripheral*

devices transfer data directly to or from each other over said bus.(in Figure 1 note the

descriptive text see the section entitled "3.2 Interconnections" and further the descriptive text

which teaches, "Both address and data busses are split into *primary* and *secondary* sections

which are connected via fast transceivers, The transceivers also isolate external interface

(microprocessor and demo board) signals from the primary busses...").

6.2 Regarding the rejection of claim 2 see the rejection of independent claim 1 above.

Claim Rejections - 35 USC § 103

The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all

obviousness rejections set forth in this Office action:

> (a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negatived by the manner in which the invention was made.

The factual inquiries set forth in *Graham* v. *John Deere Co.*, 383 U.S. 1, 148 USPQ 459

(1966), that are applied for establishing a background for determining obviousness under 35

U.S.C. 103(a) are summarized as follows:

1. Determining the scope and contents of the prior art.
2. Ascertaining the differences between the prior art and the claims at issue.
3. Resolving the level of ordinary skill in the pertinent art.
4. Considering objective evidence present in the application indicating obviousness or nonobviousness.

This application currently names joint inventors. In considering patentability of the

claims under 35 U.S.C. 103(a), the examiner presumes that the subject matter of the various

claims was commonly owned at the time any inventions covered therein were made absent any

evidence to the contrary. Applicant is advised of the obligation under 37 CFR 1.56 to point out

the inventor and invention dates of each claim that was not commonly owned at the time a later

invention was made in order for the examiner to consider the applicability of 35 U.S.C. 103(c)

and potential 35 U.S.C. 102(e), (f) or (g) prior art under 35 U.S.C. 103(a).

7.   Claim 3 is rejected under 35 U.S.C. 103(a) as being unpatentable over RIFLE-62: a

flexible environment for prototyping dynamically reconfigurable systems" by Milan Vasilko and

David Long hereafter referred to as Vasilko.

7.1   Regarding claim 3, Vasilko does not expressly disclose, wherein: a virtual input/output

register is interposed between said communication facility included in said center block and said

bus; and when transfer data is temporarily recorded in said virtual input/output register at the

timing of receiving or transmitting data, said virtual input/output register behaves like an

input/output register included in an actual microcomputer.

        However, Vasilko does disclose the use of FPGA chips to implement a PCI bus

communications system, which must also provide for the various control, data and address

registers needed to support a PCI data bus.

        Therefore, it would have been obvious to an artisan of ordinary skill, at the time the

invention was made to have *Virtual Registers* in the programmed FPGA's as disclosed in

Vasilko because otherwise the PCI functionality would not be operable.

8.   Claims 4-8 are rejected under 35 U.S.C. 103(a) as being unpatentable over RIFLE-62: a

flexible environment for prototyping dynamically reconfigurable systems" by Milan Vasilko and

David Long hereafter referred to as Vasilko in view of U.S. Patent 6,356,823 to Iannotti.

8.1   Regarding claim 4, Vasilko does not expressly disclose, wherein: an object on which said

application facility acts is a vehicle; said logic development system includes an ignition switch;

and when said logic development system is interlocked with the on or off state of said ignition

switch, control software for said vehicle is initiated or terminated in the same manner as the one

residing in said actual electronic control unit.

However, Iannotti teaches, a core module card (Figure 2 item # 36) being controlled by

an ignition switch (Figure 2 item # 86, note the label "ignition switch", see also all of Figure 8a

item # 52 and the descriptive text).

Vasilko and Iannotti are analogous art because they are both from the same problem

solving area of embedded micro-controller based systems.

At the time of the invention, it would have been obvious to a person of ordinary skill in

the art to have used the embedded system development teachings of Vasilko with the vehicle

monitoring and recording methods of Iannotti.

The motivation for doing so would have been to provide a method of data monitoring and

recording as required by current regulatory requirements (see Iannotti Col. 5 lines 25-33).

Therefore, it would have been obvious to combine Vasilko with Iannotti to obtain the

invention as specified in claims 4-8.

8.2   Regarding claim 5, Vasilko teaches, wherein: said circuits that are included in said

interface circuit block and equivalent to the hardware of said electronic control unit include at

least on facility circuit in which a microcomputer is incorporated;

However, Vasilko does not expressly disclose, said facility circuit is not actuated with the

on state of said ignition switch but is actuated synchronously with the timing of starting up the

center block.

However, Iannotti teaches, said facility circuit is not actuated with the on state of said

ignition switch but is actuated synchronously with the timing of starting up the center block (Col.

6 lines 41-46 more specifically, "...*include the ability to offer a quick boot-up time, needed to prevent loss of data...* " and Col. 7 lines 40-65).

8.3   Regarding claim 6, Vasilko does not expressly disclose wherein said facility circuit includes a power circuit that is actuated with the on state of said ignition switch, and a logic circuit that when both a signal sent from said power circuit and a signal sent from said center block become valid, actuates said microcomputer.

However, Iannotti teaches, (Col. 6 lines 41-46 more specifically, "...*include the ability to offer a quick boot-up time, needed to prevent loss of data...* " and Col. 7 lines 40-65).

8.4   Regarding claim 7, Vasilko does not expressly disclose, wherein: when said ignition switch is turned off, data that should be held is stored in either of a memory included in an external storage device connected to said logic development system and a memory included in said logic development system; when said ignition switch is turned on, data that should be held is read from said external storage device and restored; and the same capability as the capability of a backup memory is thus realized for said logic development system.

However, Iannotti teaches, Figure 2 item # 74 and more specifically, Col. 7 lines 17-39 and Col. 8 lines 49-58 and Col. 7 lines 55-57.

8.5   Regarding claim 8, Vasilko does not expressly disclose, wherein initial values to ports are set are determined within an initialization routine executed on said center block until said ignition switch is turned on after the power supply of said logic development system is turned on.

However, Iannotti teaches that during initialization the different modules are configured including the communications ports see Figure 16 item # 468 and the descriptive text and more

specifically, Col. 3 lines 43-67 and Col. 4 lines 1-23 and Col. 15 lines 1-3 more specifically, "In method path **initiated** by block **370** the user enters parameter information for analog or extra-network device data..." the system in Iannotti discloses the use of an RTOS or (Real Time Operating System) see Col. 6 lines 23-59, it would be obvious to have the *ports* i.e. the communications elements of the system of Iannotti to be initialized as in the initialization of a UART, etc...therefore Iannotti substantially teaches the obvious port initialization as expressly claimed.

9.   Claims 9-19 and 22-24 are rejected under 35 U.S.C. 103(a) as being unpatentable over RIFLE-62: a flexible environment for prototyping dynamically reconfigurable systems" by Milan Vasilko and David Long hereafter referred to as Vasilko in view of U.S. Patent 5,864,712 to Carmichael.

9.1   Regarding claim 9, Vasilko does not expressly disclose the specific implementation details of the disclosed operation of the teachings of a PCI controller expressly teaching, *wherein: said PCI bus contains a one-channel interrupt signal line over which an interrupt request is issued from said peripheral block to said center block; when said interrupt signal line is activated by said peripheral block, said application facility included in said center block accepts an interrupt request; and after the interrupt request is accepted, said interrupt signal line is inactivated.*

However, Carmichael teaches, *a one-channel interrupt signal line* (Figure(s) 6A & 6B and Col. 16 line 61 "...its outstanding interrupt flag is set..." and lines 62-67 Col. 17 lines 1-10), *a request issued from the peripheral block to the center block* (Col. 15 lines 48-67 and Col. 16

lines 1-14 more specifically "a new I/O request generated by the CPU...") and *after the interrupt signal is accepted, said interrupt signal line is inactivated* (Figure 6a and the descriptive text, when the interrupt flag is cleared the interrupt line is de-asserted).

Vasilko and Carmichael are analogous art because they are from the same problem solving area of PCI data buses.

At the time of the invention, it would have been obvious to a person of ordinary skill in the art to use the interrupt operational methods of Carmichael with the PCI bus methods of Vasilko.

The suggestion for doing so would have been that these methods of servicing interrupts in PCI bus environments are well known in the art and the invention disclosed in Vasilko would not be able to function properly without these known in the art methods of servicing interrupts on a PCI bus, see Carmichael Col. 17 lines 4-10.

Therefore, it would have been obvious to combine Carmichael with Vasilko to obtain the invention as specified in claims 9-19 and 22-24.

9.2   Regarding claim 10, Vasilko does not expressly disclose the specific implementation details, *wherein when interrupt handling is terminated, said application facility included in said center block checks if said interrupt signal line is inactive.*

However, Carmichael teaches Col. 15 lines 48-55 which clearly teaches software running on a processor (a core) where the interrupt is terminated and further that the interrupt signal line is terminated, the same as the flag being cleared, see Figure(s) 6A and 6B.

9.3   Regarding claim 11, Vasilko does not expressly disclose the specific implementation

details, *wherein when interrupt handling is terminated, if said interrupt signal line is active, said*

application facility included in said center block inactivates said interrupt signal line.

However, Carmichael teaches the functional equivalent, see Figures 6A and 6B and the

descriptive text and Figure 6C specifically items #'s 604, 605 & 607 and the descriptive text

more specifically Col. 15 lines 56-67 and Col. 16 lines 1-45 which clearly details the operation

of servicing and then disabling an interrupt service request made by a peripheral (PCI device).

9.4   Regarding claim 12, Vasilko does not expressly disclose the specific implementation

details *wherein: said computing facility included in said peripheral block includes a facility for*

temporarily fetching data; when a large amount of data is transferred between said center block

and each of said quasi microcomputer peripheral devices included in said peripheral block, the

large amount of data is transferred in a burst mode between said center block and said

computing facility, and transferred in a non-burst mode between said computing facility and

each of said quasi microcomputer peripheral devices.

However, Carmichael teaches the transfer of data between the computing facility and the

peripheral block (Figure 1 and the descriptive text), as well as transferring the data using burst

mode (Col. 6 lines 24-50 more specifically "...during buffer sized bursts of data...") the non-

burst mode is referred to as programmed I/O transfer which PCI bus master devices are capable

of programmed during the initialization period.

9.5   Regarding claim 13 Vasilko does not expressly disclose the specific implementation

details, *wherein after said application facility included in said center block accepts an interrupt*

request, said application facility acquires interrupt flags from each of said quasi microcomputer

peripheral devices over said bus; after said application facility acquires interrupt flags, said

application facility clears the interrupt flags present in each of said quasi microcomputer

peripheral devices.

However, Carmichael teaches the management and clearing or servicing of interrupts and

the interrupt flags during the course of operation of a DMA bus master controller using

scatter/gather DMA data transfer (Figure(s) 1, 6 and the descriptive text, more specifically Col. 6

lines 24-50 and Col. 15 lines 56-67 and Col. 16 lines 1-45).

9.6   Regarding claim 14, Vasilko does not expressly disclose the specific implementation

details, *wherein after said application facility included in said center block acquires interrupt*

flags, said application facility executes a process associated with each of acquired interrupt

flags.

However, Carmichael teaches or makes obvious, acquisition of interrupt flags and

executing a process when those flags are acquired (Col. 16 lines 15-45 and Figure 6A, 6B, 6C

and more specifically, "...element 662 is operable to set a flag indicating that channel 0 has an

outstanding interrupt condition...").

9.7   Regarding claim 15, Vasilko does not expressly disclose the specific implementation

details *wherein: after said application facility included in said center block accepts an interrupt*

request, said application facility acquires a plurality of interrupt flags from each of said quasi

microcomputer peripheral devices over said bus; said application facility selects one interrupt

flag assigned a high priority, and executes a process associated with the interrupt flag; and after

the process is completed, said application facility clears a process completion interrupt flag

present in each of said quasi microcomputer peripheral devices.

However, Carmichael teaches or makes obvious, acquisition of interrupt flags and executing a process when those flags are acquired (Col. 16 lines 15-45 and Figure 6A, 6B, 6C and more specifically, "...element 662 is operable to set a flag indicating that channel 0 has an outstanding interrupt condition...") regarding the clearing of the flags see (Col. 16 lines 42-45 more specifically "...processing continues with element 668 to clear the flag indicating an outstanding interrupt is pending on channel 1...").

9.8   Regarding claim 16, Vasilko does not expressly disclose the specific implementation details *wherein after said application facility selects one interrupt flag assigned a high priority, and executes a process associated with the interrupt flag, said application facility re-acquires a plurality of interrupt flags from each of said quasi microcomputer peripheral devices over said bus.*

However, Carmichael teaches or makes obvious, the execution of a process *interrupt service routine* see Col. 15 lines 11-26 more specifically, "...complex interrupt handling software for the host processor..." regarding priority see Col. 16 lines 15-45 and Figure(s) 6A, 6B and 6C.

9.9   Regarding claim 17, Vasilko does not expressly disclose the specific implementation details *wherein said interrupt flags are concurrently stored at successive addresses in one of registers included in each of said quasi microcomputer peripheral devices.*

However, Carmichael teaches the functional equivalent of storing flags in registers by instead storing PRD table entries that are used to obtain outstanding interrupt requests, see Figure 4 item #138 and the descriptive text and Figure(s) 6A, 6B, and 6C.

9.10   Regarding claim 18, Vasilko does not expressly disclose the specific implementation

details, *wherein: a plurality of peripheral blocks is included; interrupt flags representing*

interrupts caused by each of resources that are included in each of said peripheral blocks are

stored in a register included in each of said peripheral blocks; the interrupt flags representing

interrupts caused by each of the resources included in the first peripheral block are stored in the

register included in the first peripheral block; and an extension interrupt flag indicating whether

interrupt flags, representing interrupts caused by each of resources included in each of the

remaining peripheral blocks, are present is stored in association with ach peripheral block.

However, Carmichael teaches or makes obvious, the storing of interrupt flags in registers,

it is noted by the examiner that modern Central Processing Units contain interrupt flag tables and

further contain registers for storing interrupt vectors or pointers to interrupt service routines,

these vector table are used when servicing the interrupts as disclosed in Carmichael, see

Figure(s) 6A, 6B and 6C and the descriptive text, more specifically see Col. 15 lines 11-26 more

specifically, "...complex interrupt handling software for the host processor..." regarding priority

see Col. 16 lines 15-45.

9.11   Regarding claim 19, Vasilko does not expressly disclose the specific implementation

details *wherein if said extension interrupt flag demonstrates that interrupt flags are stored in the*

register included in any of the remaining peripheral blocks, said application facility acquires the

interrupt flags from the register in the remaining peripheral block.

However, Carmichael teaches or makes obvious the clearing of all interrupt flags

scatter/gather DMA as disclosed requires that all blocks of data be transferred from the host PCI

controller to memory and that an interrupt be periodically sent to signal that a transfer from

memory or to memory has been completed. Once an interrupt has been serviced the system

reacts to the next interrupt, see Figure 5B which describes that process, note item # 157 I/O

device and I/O controller signal completion of channel 1 PRD table DMA transfers to processor"

which then leads to item # 150 in Figure 6A which discloses, "I/O control device fetches next

physical region descriptor entry from the channel 0 PRD table" which then continues to item #

668 "Clearing outstanding interrupt channel 1 flag" which means there is a queue of interrupt

flags that are being serviced. Applicants' are merely claiming the mechanisms for storing

pending interrupts and how a processor coupled to a PCI bus and devices services those

interrupts.

9.12   Regarding independent claim 22, *Vasilko* teaches all of the claimed limitations, as

rejected above for independent claims 1 & 2 with the exception that it fails to expressly disclose

the specific implementation details, *wherein: when an interrupt factor occurs in any of said*

quasi peripheral devices, said application facility reads or writes data in or from said quasi

peripheral device; and data whose processing speed is requested to be low is read or written all

together during communication performed before or after the action of said application facility.

However, Carmichael teaches or makes obvious processing an interrupt, which is

functionally the same as an *interrupt factor* (Figure 6A, 6B and 6C and the descriptive text more

specifically Col. 15 lines 11-26 more specifically, "...complex interrupt handling software for

the host processor...") and regarding transferring of data, i.e. reading or writing data, clearly

Carmichael teaches, (Figure 4 and the descriptive text) regarding the limitation ; *and data whose*

processing speed is requested to be low is read or written all together during communication

performed before or after the action of said application facility PCI controllers will buffer the

data as in arrives and store the contents into main memory, the processor regardless of speed,

will then be able to process the data after the interrupt is produced by the PCI controller, the end

result is that if the processor is executing at a lower speed the data will still be available

afterward which is the functional equivalent of Applicants' claimed slower processor.

9.13   Regarding claim 23, *Vasilko* teaches all of the claimed limitations, as rejected above for

independent claims 1 & 2 with the exception that it fails to expressly disclose the specific

implementation details, *said microcomputer logic development method comprising the steps of;*

issuing an interrupt request from said peripheral block to said center block over a one-channel

interrupt signal line contained in said bus; accepting the interrupt request when said interrupt

signal line is activated by means of said peripheral block; inactivating said interrupt signal line

after the interrupt request is accepted.

However, Carmichael teaches or makes obvious *said microcomputer logic development*

method comprising the steps of; issuing an interrupt request from said peripheral block to said

center block over a one-channel interrupt signal line contained in said bus; accepting the

interrupt request when said interrupt signal line is activated by means of said peripheral block;

inactivating said interrupt signal line after the interrupt request is accepted.

Carmichael teaches the functional equivalent of acquisition of interrupt flags and

executing a process when those flags are acquired (Col. 16 lines 15-45 and Figure 6A, 6B, 6C

and more specifically, "...element 662 is operable to set a flag indicating that channel 0 has an

outstanding interrupt condition...") regarding the clearing of the flags see (Col. 16 lines 42-45

more specifically "...processing continues with element 668 to clear the flag indicating an

outstanding interrupt is pending on channel 1...")

9.14 Regarding claim 24 Vasilko does not expressly disclose the specific implementation

details further comprising the steps of: *after an interrupt request is accepted, acquiring interrupt*

flags from each of said quasi microcomputer peripheral devices over said bus; and after the

interrupt flags are acquired, clearing the interrupt flags from each of said quasi microcomputer

peripheral devices.

However, Carmichael teaches, the functional equivalent of acquiring interrupt flags

(Figure 6B item # 663 "set outstanding interrupt channel 1 flag"), and over a bus (Figure 1 item

32 and it is noted that Vasilko teaches a PCI bus) and clearing the interrupt flags at the

completion of the processing (Figures 6A, 6B and 6C and the descriptive text).

10.   Claims 20 and 21 are rejected under 35 U.S.C. 103(a) as being unpatentable over RIFLE-

62: a flexible environment for prototyping dynamically reconfigurable systems" by Milan

Vasilko and David Long hereafter referred to as Vasilko in view of U.S. Patent 5,908,455 to

Parvahan.

10.1   Regarding claim 20, Vasilko does not expressly disclose, wherein: a plurality of

peripheral blocks is included; the first peripheral block alone includes a free-run timer; said first

peripheral block includes at least resources that act synchronously with the timer value of said

free-run timer; and the remaining peripheral blocks include resources independent of said free-

run timer.

However, Parvahan teaches, (Figure 9 "32 *-BIT FREE RUNNING TIMER" see also the

descriptive text more specifically Col. 4 lines 64-65 and Col. 11 lines 25-54).

Vasilko and Parvarhan are analogous art because they both come from the embedded

system art and the use of PCI busses.

At the time of the invention, it would have been obvious to a person of ordinary skill in

the art to combine the FPGA embedded system methods of Vasilko with the automotive data

collection methods of Parvarhan.

The motivation for doing so would have been to provide for high speed data analysis

using high-speed channels, see Col. 4 lines 7-37 and further it should be observed that the use of

the methods of Vasilko would greatly decrease the amount of time required to modify or design

the system of Parvarhan.

Therefore, it would have been obvious to combine Parvarhan and Vasilko to obtain the

invention as specified in claims 20 and 21.

10.2 Regarding claim 21, Vasilko does not expressly disclose, wherein: *the resources that act*

synchronously with the timer value of said free-run timer include a comparator and a capture

unit; and the resources independent of said free-run timer include a pulse-width modulator

(PWM), a communication unit, an A/D converter, and ports.

However, Parvarhan teaches Ports, capturing Port data and A/D/ converters as well as the

functional equivalent of a pulse width modulator (see Figures 4, 5 specifically items # 430

a,b,c,d & e and note that these devices are implemented on an FPGA, Figure 6 and further see

Figure 7 which again teaches A/D converters and PLX PCI devices and Figure 8 for the same

further see Col. 2 lines 20-47 and Col. 8 lines 16-36).
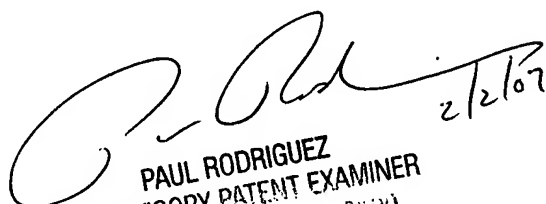
Conclusion

11.   Any inquiry concerning this communication or earlier communications from the

examiner should be directed to Dwin M. Craig whose telephone number is (571) 272-3710. The

examiner can normally be reached on 10:00 - 6:00 M-F.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's

supervisor, Paul L. Rodriguez can be reached on (571) 272-3753. The fax phone number for the

organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent

Application Information Retrieval (PAIR) system. Status information for published applications

may be obtained from either Private PAIR or Public PAIR. Status information for unpublished

applications is available through Private PAIR only. For more information about the PAIR

system, see http://pair-direct.uspto.gov. Should you have questions on access to the Private PAIR

system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would

like assistance from a USPTO Customer Service Representative or access to the automated

information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

Dwin McTaggart Craig

PAUL RODRIGUEZ
SUPERVISORY PATENT EXAMINER
TECHNOLOGY CENTER 2100